

# Symmetrical Horn Carrier Class Gen 2

## HORN ANTENNA WITH N-FEMALE CONNECTORS

Symmetrical Horn CC Antennas Gen2 offer unique RF performance in a compact package. Scalar horn antennas have symmetrical main beam with identical beam width in Vertical and Horizontal plane. Exceptionally small side lobes ensure remarkable interference suppression. HG3-CC Gen2 Antennas are ideal for coverage of areas with clients close to the installation site, where null zone issues exist. High density AP clusters and radio co-location is made possible due to unique radiation patterns and compact size.

Symmetrical Horn CC Antennas Gen2 feature multiple improvements of RF performance and design, namely, optically lighter body and significantly improved bracket. Radome is made of more resistant material, and all of HG3-CC Gen2 antennas use only two radome sizes. HG3-CC Gen2 antenna is equipped with N-female connectors.




### TECHNICAL DATA

Radio Connection	2x N Female Bulkhead Connector
Antenna Type	Horn
Materials	UV Resistant polycarbonate, Polypropylene, Aluminium, Zinc, Stainless Steel
Environmental	IP55
Flame Rating	UL 94 HB
Pole Mounting Diameter	30-80 mm (1.1-3.1 inch) Recommended as close to 80 mm (3.1 inch) as possible
Temperature	-30°C to +55°C (-22°F to +131°F)
Wind Survival	160 km/h (100 mi/h)
Wind Load	37/28 N - Front/Side at 160 km/h (100 mi/h)
Effective Projected Area	304/230 cm <sup>2</sup> - Front/Side (47.1/35.7 in <sup>2</sup> )
Mechanical Tilt	± 25°
Weight	2.4 kg / 5.2 lbs – single unit 3.7 kg / 8.1 lbs – single unit incl. package 38.1 kg / 83.9 lbs – carton (5 units)
Single Unit	Retail Box: 412 x 277 x 234 mm (16.2 x 10.9 x 9.2 inch)
5 Units	Carton Box: 1190 x 300 x 440 mm (46.8 x 11.8 x 17.3 inch)


### PERFORMANCE

Frequency Range	<b>5180 - 6775 MHz*</b>	
Gain	18.4 dBi	
Beam Efficiency**	94%	
Front-to-Back Ratio	37 dB	
Azimuth Beam Width	-3 dB: H 21° / V 21°	-6 dB: H 30° / V 30°
Elevation Beam Width	-3 dB: H 21° / V 21°	-6 dB: H 30° / V 30°
VSWR Max	5180-5850 MHz: 1.6	5850-6775 MHz: 1.9
Polarization	Dual Linear H + V	
Impedance	50 Ohm	


### PRODUCT DIMENSIONS

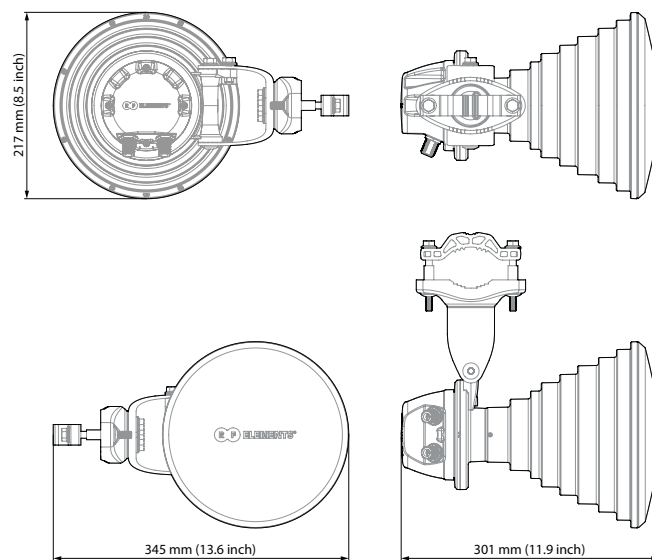


### AZIMUTH PATTERN



### ELEVATION PATTERN





### GAIN

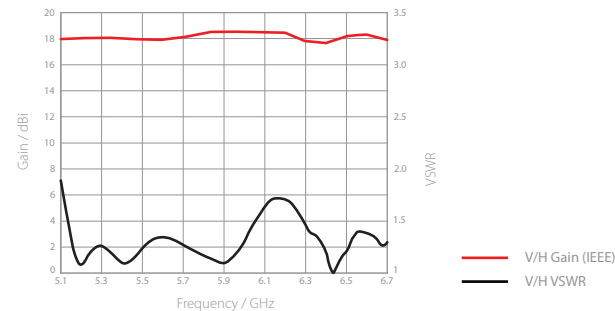

\* We strongly recommend that users do not operate radios outside of the specified frequency range  
\*\* Beam efficiency defined up to first null

3D radiation diagram

Scale: 30dBi  
Compatible with: Adobe Acrobat Reader DC. Not supported on mobile.  
Use mouse to rotate the diagram. Scroll in/out to zoom in/out.

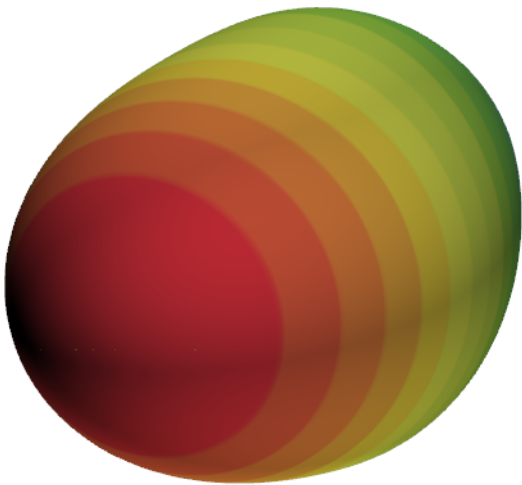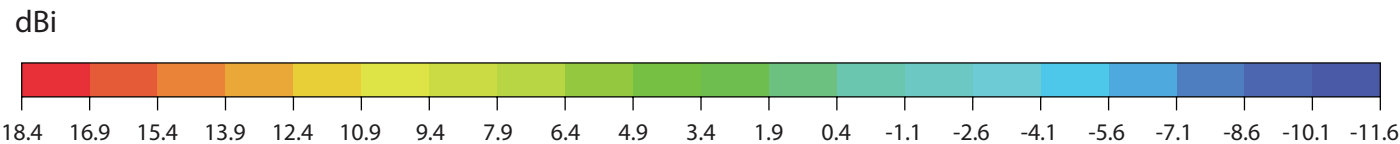

FRONT	BACK	RIGHT	LEFT	UP	DOWN
-------	------	-------	------	----	------