

Sector Carrier Class 5-17 2x2 H+V

SECTOR ANTENNA WITH CARRIER CLASS PERFORMANCE


RF elements CARRIER CLASS Sectors are addressing customer requirements for exceptional RF performance, co-location noise resistance, ease of installation and cost efficiency. Our antennas feature an innovative patent pending Back-Shield™ system of frequency selective reflectors that are incorporated into the antenna structure to attenuate side lobes and backside near field radiation.

All CARRIER CLASS Sectors are designed with independent horizontal and vertical polarization antenna elements for unmatched RF performance.




5 GHz 17 dBi


Gain H

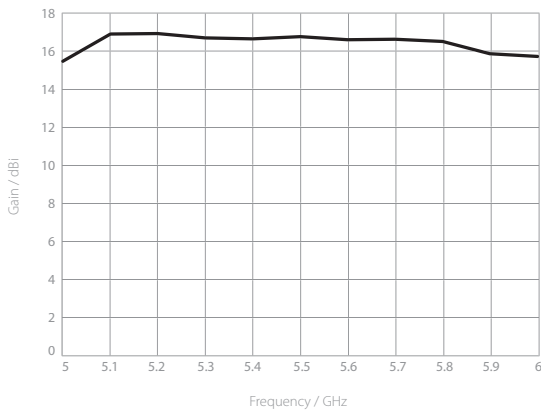


Azimuth Pattern H




Elevation Pattern H




Gain V

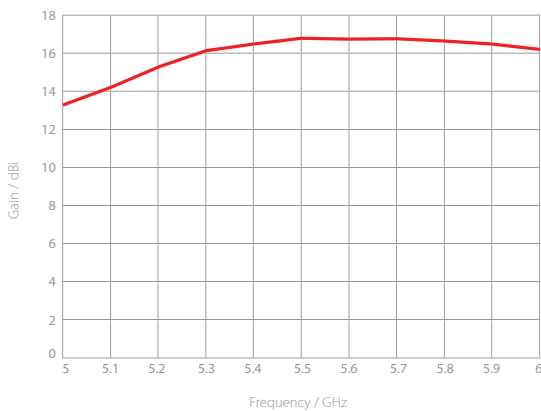

Azimuth Pattern V



Elevation Pattern V



PHYSICAL

Antenna Connection	2x RP-SMA on integrated semi-flex pigtails
Antenna Type	5 GHz 17 dBi
Enviromental	IP55
Temperature	-26°C to +60°C (-15°F to +140°F)
Wind Survival	160 km/hour
Electrical Downtilt	0°
Pole Mounting Diameter	max 85 mm
Weight	2.5 kg / 5.5 lbs – single unit 3.5 kg / 7.7 lbs – single unit incl. package
Single Unit	Retail Box: 97.5 x 22 x 10 cm

PERFORMANCE

Frequency Range	5240 - 5850 MHz
Gain	17.5 dBi
Polarization	Dual Linear H + V
Azimuth Beam Width -3 dB	H 75° / V 75°
Elevation Beam Width -3 dB	H 7° / V 7°
Azimuth Beam Width -6 dB	H 100° / V 100°
Elevation Beam Width -6 dB	H 10° / V 10°
Front-to-Back Ratio (Min)	30 dB
Cross Pol Isolation	H 20 dB / V 20 dB
Impedance	50 Ohm
VSWR Max	1.8***
VSWR Typical	1.35
Isolation Between Ports	35 dB

COMPATIBLE WIRELESS PLATFORMS

RF elements®	StationBox® S, StationBox® S CARRIER CLASS, RockShield™
Cambium Networks™	ePMP™ 1000 Connectorized Radio*
MikroTik™	BaseBox**, NetBox**, NetMetal **
Ubiquiti Networks™	UBNT Rocket™ M5, UBNT Rocket™ M5 Titanium UBNT Rocket™ 5ac, UBNT Rocket™ 5ac Prism

*with EasyBracket™ for ePMP™
 **with EasyBracket™ 912
 ***below 5240 the VSWR exceeds 2

PRODUCT DIMENSIONS

