

StationBox® XL


CPE WITH HIGH GAIN DUAL POLARIZATION ANTENNA

StationBox® XL is outdoor enclosure with built-in high gain dual polarization antenna. It is designed for easy integration with variety of MikroTik™ RouterBoards and deployment as mid range CPE or short distance PtP connection. Enclosure can host RB433 with 3 radio cards to feed other external antennas.




5 GHz 18 dBi


Gain H

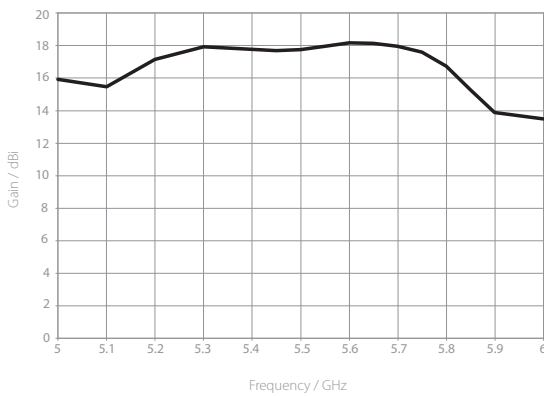


Azimuth Pattern H




Elevation Pattern H




Gain V

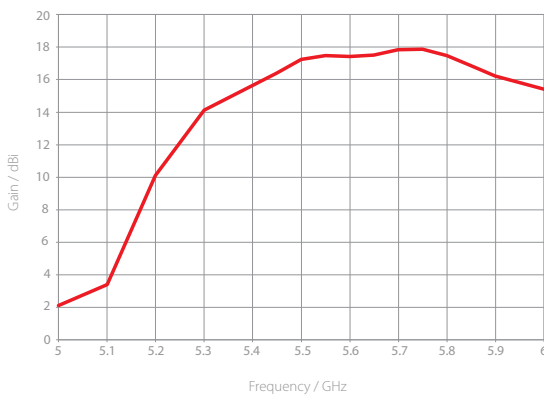

Azimuth Pattern V




Elevation Pattern V




2.4 GHz 14 dBi


Gain H

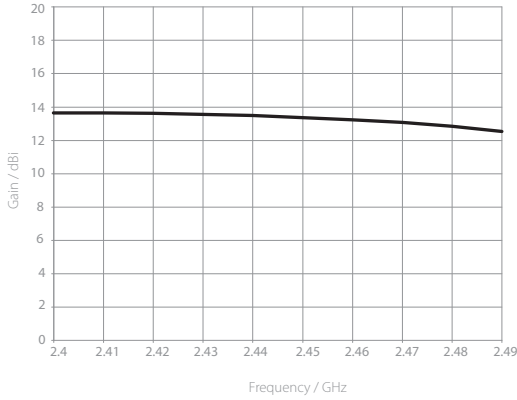


Azimuth Pattern H




Elevation Pattern H




Gain V

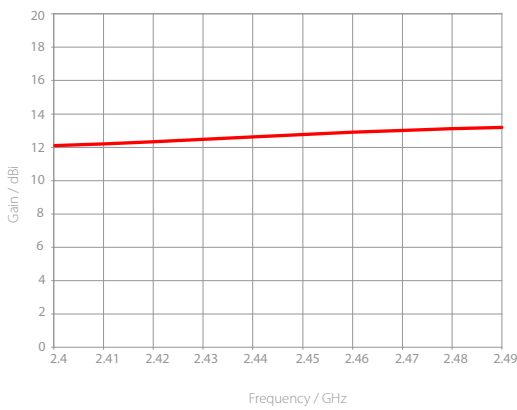

Azimuth Pattern V



Elevation Pattern V



PERFORMANCE

Antenna Type	5 GHz 18 dBi	2.4 GHz 14 dBi
Frequency Range	5450 - 5850 MHz	2400 - 2485 MHz
Gain	H 18.3 dBi / V 18.1 dBi	H 13.7 dBi / V 13.1 dBi
Polarization	Dual Linear H + V	Dual Linear H + V
Azimuth Beam Width -3 dB	H 15° / V 14°	H 31° / V 34°
Elevation Beam Width -3 dB	H 15° / V 14°	H 34° / V 32°
Azimuth Beam Width -6 dB	H 21° / V 20°	H 43° / V 48°
Elevation Beam Width -6 dB	H 20° / V 20°	H 47° / V 45°
Front-to-Back Ratio (Min)	29 dB	22 dB
Cross Pol Isolation	H 28 dB / V 28 dB	H 28 dB / V 23 dB
Impedance	50 Ohm	50 Ohm
VSWR Max	1.8	1.8
VSWR Typical	1.4	1.5
Isolation Between Ports	30 dB	22 dB

PHYSICAL

Antenna Connection	2x MMCX with integrated semi-flex pigtails
Environmental	IP65
Temperature	-30°C to +60°C (-22°F to +140°F)
Wind Survival	120 km/hour
Weight	1.6 Kg / 3.5 lbs – single piece incl. package 17.3 Kg / 38 lbs – carton (10 pcs)
Single Piece	Retail Box: 34 x 27 x 10 cm
10 Units	Carton Box: 36 x 28 x 100 cm

COMPATIBLE WIRELESS PLATFORMS

RouterBoard™ 9 series | RouterBoard™ RB912, RB911, RB711, RB433, RB411

PRODUCT DIMENSIONS

