

UltraHorn™ CC 5-24

ULTIMATE NOISE-REJECTING DIRECTIONAL HORN ANTENNA
WITH CARRIER CLASS PERFORMANCE

The UltraHorn™ CC 5-24 is a horn antenna with high gain, high directivity, and symmetrical radiation pattern. Symmetrical beam with equal horizontal and vertical beam widths, combined with zero side lobes, offers impeccable performance in terms of interference rejection. No need to spend extra money for radomes, shrouds, or any other additional shielding.

UltraHorn™ CC 5-24 Antenna is suitable for point-to-point links in high noise areas. Thanks to the unique radiation characteristics, UltraHorn™ CC 5-24 delivers excellent performance as narrow beam sector antenna, offering versatile tool for precise network planning. UltraHorn™ CC 5-24 is dual polarization antenna system (H+V) equipped with two N-female connectors.




TECHNICAL DATA

Antenna Connection	2x N Female Bulkhead Connector
Antenna Type	Horn
Materials	UV Resistant ABS Plastic, Polycarbonate, Polypropylene, Aluminium, Stainless Steel
Environmental	IP55
Pole Mounting Diameter	30-80 mm (1.2-3.1 inch) Recommended as close to 80 mm (3.1 inch) as possible
Temperature	-30°C to +60°C (-22°F to +140°F)
Wind Survival	160 km/h (100 mi/h)
Wind Load	136/113 N - Front/Side at 160 km/h (100 mi/h)
Effective Projected Area	1117/928 cm² - Front/Side (173.1/143.8 in²)
Mechanical Adjustment	± 25° Elevation, ± 25° Azimuth
Weight	8.7 kg (19.1 lbs) – single unit 9.7 kg (21.4 lbs) – single unit incl. package
Single Unit	Retail Box: 57.0 x 57.0 x 66.0 cm (22.4 x 22.4 x 26 inch)


PERFORMANCE

Frequency Range	5180 - 6775 MHz*
Gain	24 dBi
Beam Efficiency**	99 %
Front-to-Back Ratio	40 dB
Azimuth Beam Width	-3 dB: H 11° / V 11° -6 dB: H 16° / V 15°
Elevation Beam Width	-3 dB: H 11° / V 11° -6 dB: H 16° / V 15°
VSWR Max	5180-5850 MHz: 1.6 5850-6775 MHz: 1.8
Polarization	Dual Linear H + V


PRODUCT DIMENSIONS

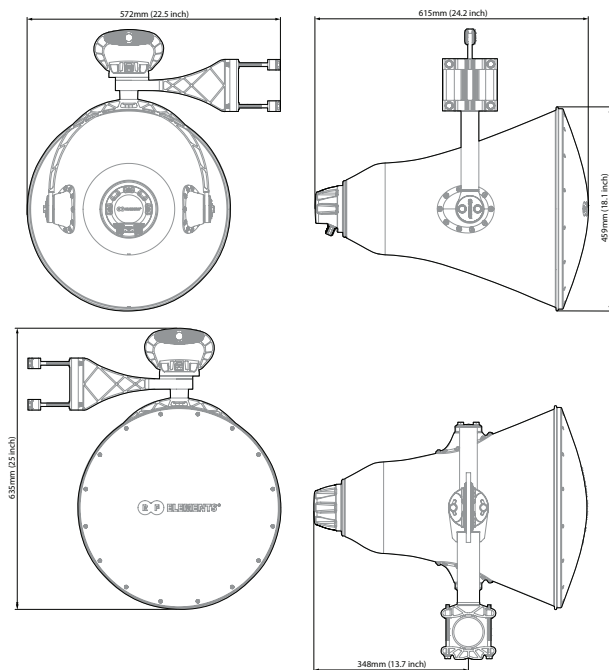


AZIMUTH PATTERN



ELEVATION PATTERN





GAIN

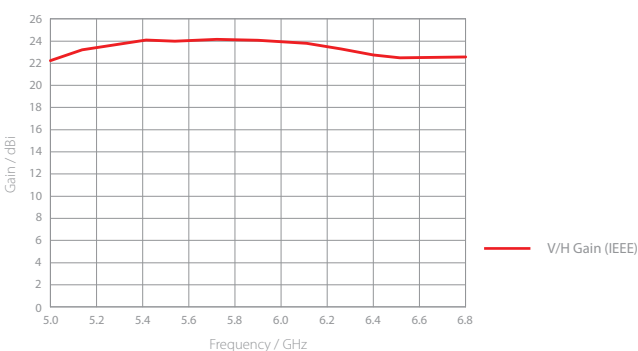

* We strongly recommend that users do not operate radios outside of the specified frequency range
** Beam efficiency defined up to first null

3D radiation diagram

Scale: 30dBi
Compatible with: Adobe Acrobat Reader DC. Not supported on mobile.
Use mouse to rotate the diagram. Scroll in/out to zoom in/out.

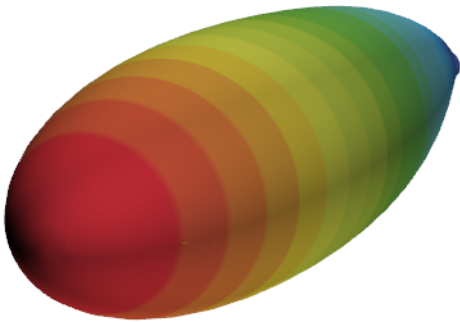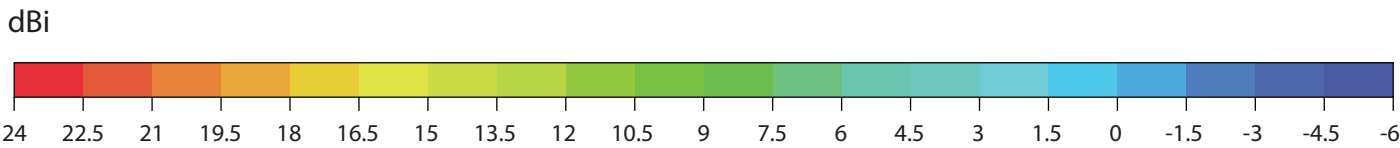

FRONT	BACK	RIGHT	LEFT	UP	DOWN
-------	------	-------	------	----	------