

Product Datasheet

Product ID: TPA-RBC



TPA-RBC TwistPort™ Adaptor for RouterBoard M11 and RB Series – 5 GHz Wireless Platform Integration


FOR RB M11, 9XX, 7XX, 4XX SERIES BOARDS



TECHNICAL DATA

Antenna Connection	TwistPort - Quick Locking Waveguide Port
Materials	Insert - Aluminium Alloy Body - Aluminium Alloy
Radio Connection	2x Right Angle MMCX
Temperature	-40°C to +60°C (-40°F to +140°F)
Wind Survival	160 km/h
Weight	0.55 Kg / 1.2 lbs – single unit 0.74 Kg / 1.6 lbs – single unit incl. package 15.8 Kg / 34.8 lbs – carton (20 units)
Single Unit	Retail Box: 19.2 × 17.7 × 9.0 cm
20 Units	Carton Box: 92.0 × 38.0 × 22.0 cm

PRODUCT DIMENSIONS

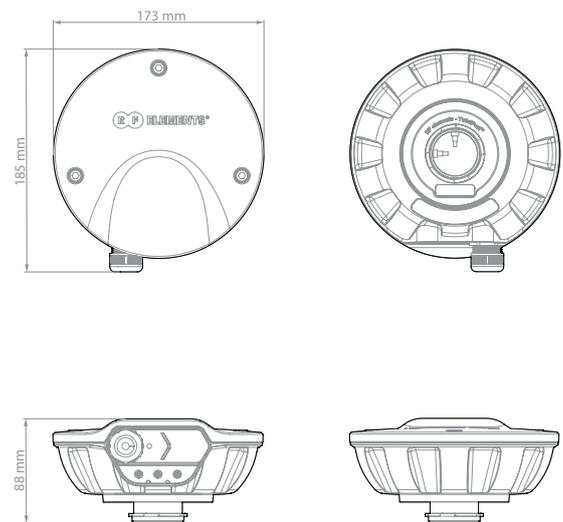

PERFORMANCE

Frequency Range	5180 - 6400 MHz
Polarization	Dual Linear H + V
VSWR Max	1.8
Impedance	50 Ohm

COMPATIBLE WIRELESS PLATFORMS

RF elements®	any TwistPort™ Antenna
MikroTik™	RouterBoard™ RB91x, RB92x, RB71x, RB411L*, RBM11G

PACKAGE CONTENTS

- TwistPort™ Adaptor
- Screw M3x8mm (2 pcs)
- Blind Plate

* Ensure the radio module size fits.

TwistPort™ Adaptor Rev FEB-2026

RF elements® and TwistPort™ are trademarks of RF elements s.r.o., Humenne, Slovakia.
All rights of respective trademark owners reserved.
© RF elements 2026